


Hi-Flow™ MDO CONCRETE FORM

Product Description:

Hi-Flow™ MDO is a standard Medium Density Overlayed plywood concrete form for matte finishes with a factory applied release coating. It provides enhanced alkalinity resistance vs. regular MDOs.

Panel Construction/Moisture Resistance:

Hi-Flow™ MDO is an overlay on Douglas Fir faced plywood with Doug Fir construction. It is manufactured with a 1-step layup, has a waterproof glue bond and meets APA PS 1-07. All Olympic products are made in the USA.

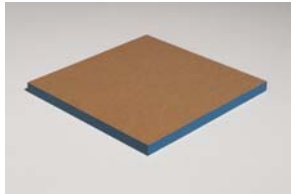

Features and Benefits:

- Enhanced alkalinity resistance vs. regular MDOs
- Matte finish = good base for coated concrete
- Factory applied Nox-Crete FormCoat
- Balanced substrate construction promotes stability
- Increased # of pours & reduced cost


Working Faces/Treatment:

- Hi-Flow MDO is available with 1 (standard) or 2 (optional) working faces. Standard panels with a single working face.
- Gloss level of Concrete Surface: Matte
- Wood Grain Transfer to Concrete Surface: Moderate
- Wood Defect Transfer to Concrete: Moderate
- Sugaring: None
- Maintenance: Occasional

Working Edges/Treatment:

- Factory sawn and sealed with special Styrene Acrylic sealer.
- Seal all exposed wood (edges and holes) with Edge Flex 235 by Nox-Crete, Olympic Form Seal by Willamette Valley Co. or equivalent to prevent concrete staining from the wood sugars.

Alkalinity Resistance after Chemical Exposure

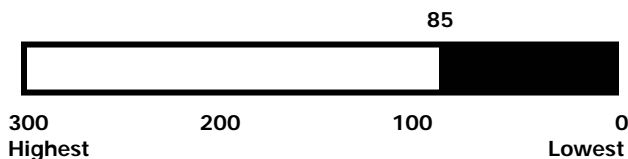

The Abrasion and Chemical Resistance Test reflects the expected panel life in the field. The higher the index number, the more resistant to alkalinity/abrasion.

Structural/Load Performance Summary

Hi-Flow™ MDO is available with custom load tables. Allowable pressure $l/270$ 17.5 mm @ 200 mm OC (face gain across supports):
Struct 1: 89.8 kNm²

Pour Ranges:

- Engineered systems: Not Recommended
- Gang forms: Up to 20
- Job built: Up to 10
- Number of pours may vary due to jobsite handling and panel maintenance, vertical or horizontal use, form release agent, concrete mix design/strength, alkalinity & pour rate and other factors.

Release Coating:

- Release agent: Nox-Crete FormCoat
- Coating required: light, before first and each subsequent pour.
- Recommended release agent: Nox-Crete FormCoat or equivalent.
- Avoid release agents containing fuel oils, recycled oils, or solvents.

Limitations:

Do not exceed design limitations imposed by the load span table. Conform to concrete form design procedures based on American Concrete Institute (ACI) standard 347-04. Release agents are required. Do not employ used concrete form for structural applications. Do not coat or laminate this panel without surface preparation. For coating or laminating information, ask Olympic for technical assistance.

Thicknesses & Sizes:

Olympic Hi-Flow™ MDO is available in: 17.5 MM. Standard panel sizes are 1220 X 2440 & 1220 X 3050. Non-standard thicknesses and widths meeting volume requirements are available.

Technical Data Applicable Standards

All panels are manufactured by Olympic Panel Products per Product Standard PS 1-07. This standard is available at www.apawood.org.

Physical Properties	17.5 mm
Check Resistance – APA test #6	1.0mm
Moisture Resistance (Cobb) 8 hour soak	48.4 g/m ²
Alkalinity Resistance after chemical exposure D/T	85
Formaldehyde level ASTM E-1333	0.03 ppm

*Resin system is 100% Phenolic and contains no added Urea resins

Panel Tolerance	17.5 mm
Thickness Tolerance	+/- 0.79 mm
Length & Width Tolerance	+0, -1.6 mm
Squareness	1.6 mm
Straightness	1.6 mm

Note: All tolerances and specifications apply at the time of manufacture. Note: Product averages vary for individual thicknesses. Consult Sales or Technical offices for exact properties.

Standard Packaging:

Thickness	Hi-Flow™ MDO 1 Face, MDO Back Average Weight* Kg/m ²	Hi-Flow™ MDO 2 Face Average Weight* Kg/m ²	Pieces per Unit
17.5 mm	9.94	10.3	48

*Average product weights may vary +/- 10%

Product Grade

Standard product is shipped on grade only. Special Product is shipped allowing up to 10% total Good One Side (G1S) and/or Shop, identified & priced separately. Shipments of G1S and shop may be available.

Warehouse Storage and Handling

- Store in a dry, clean, well – ventilated area indoors.
- Avoid temperatures and moisture extremes. Allow panels to equalize for 72 hours or more before use.
- Pieces must not be stored in contact with the ground.
- Limit the stacking height to four or five units. Separate units with clean, dry spacers of uniform thickness, aligned carefully. Use three spacers for panels 2,440 mm long, four or five spacers for longer panels.

- **Enhanced alkalinity resistance vs. regular MDOs**
- **Matte finish = good coated concrete base**
- **Factory applied Nox-Crete FormCoat**
- **Balanced substrate design promotes stability**
- **Increased pours & reduced cost/pour**

Stress and Load Span Tables

These stress and load span tables simulate actual wet form conditions. Dry load span values are overstated and should not be used. Canadian (COFI) design values for Douglas Fir are 25% higher than APA

Stress Tables: Tables 1 & 2 herein are based on standard APA PS-1 criteria and T2008P-79 Veneer Stresses.

Stress Table – Dry Working Stress Design Capacities		
	Struct 1	Wet Adjust Factor
Nominal Thickness	17.5mm	
Number of Plies	7	
Table 1: Face Grain <i>Perpendicular</i> to Supports		
Bending Stiffness ¹	4.157	0.85
Bending Resistance ²	0.568	0.75
Planar Shear ³	6.391	0.75
Table 2: Face Grain <i>Parallel</i> to Supports		
Bending Stiffness ¹	1.835	0.85
Bending Resistance ²	0.392	0.75
Planar Shear ³	5.332	0.75

¹Bending Stiffness = EI* (kNm²/m);

²Bending Resistance = M or FS (kNm/m)

³Planar Shear Capacity: V or F lb/Q (kNm/m).

There is no DOL (Duration of Load) or Experience factor applied to EI, FbS and Fslb/Q.

Load Span Tables: Tables 3 & 4 are based on standard APA and PS-1 criteria.

Struct 1 LOAD SPAN TABLES – WET CONDITIONS		
Recommended Maximum kN/m ² on 17.5mm Panels		
Table 3: Face Grain <i>Perpendicular</i> to Supports ¹		
Support Spacing	Plywood Thickness – Allowable Pressure (kN/m ²) Structural 1	
(mm)	ℓ/360	ℓ/270
100	234.9	234.9
200	89.8	89.8
300	52.5	55.5
400	24.5	32.6
500	13.1	17.5
Table 4: Face Grain <i>Parallel</i> to supports ¹		
Support Spacing	Plywood Thickness – Allowable Pressure (kN/m ²) Structural 1	
(mm)	ℓ/360	ℓ/270
100	196.0	196.0
200	74.9	74.9
300	29.4	39.1
400	12.6	16.8
500	7.9	10.6

Notes: ¹Plywood continuous across two or more spans

These are total loads (weight of panel should be considered in horizontal applications)

DOL (Duration of Load) 1.25 and Experience factor of 1.30 used in load tables.

Form Panel Thickness: For more detailed design information, refer to APA publication "Plywood for Concrete Forming" and to American Concrete Institute publication "Formwork for Concrete".

Edge Support: In high moisture/sustained load conditions, edges may have a greater deflection than the panel centre and may exceed calculated deflection.

Suitability for Use and Warranty:

Nothing herein constitutes a warranty express or implied, including any warranty of merchantability or fitness for use, nor is protection from any law or patent to be inferred. The exclusive remedy for all claims is replacement of materials. Contact Olympic Panel Products for a copy of the warranty and limitations.

Olympic Panel Products LLC and Olympic Panel are registered trademarks of Olympic Panel Products LLC.

© 2007 Olympic Panel Products LLC.

All Rights Reserved. Printed in the USA.

Specifications subject to change without notice.

Effective: 2/2010; Replaces: 6/2008

Jobsite Care and Handling

- Product preparation:** OPP's MDO panels are factory release coated. However, lightly coat panels prior to first use and each subsequent use with Nox-Crete Form Coat or equivalent agent that will not bond with, stain, or adversely affect concrete surfaces. Follow the manufacturer's recommendations for application.
- Pouring and Vibrating:** Follow the rate of pour to reduce excessive pressure that can cause panel damage. Use rubber tipped vibrators and exercise care not to damage form faces.
- Stripping:** Prolong panel life with proper stripping and handling. Use wood wedges, rather than metal bars or pries, to separate the form from the concrete. Form panels must be lowered, not thrown or dropped, to avoid face and edge damage.
- Cleaning:** Storage and Edge Sealing: Clean panels after each use, employing burlap or flat, non-scratching tools such as plastic or wood scrapers. Reseal cut edges or exposed wood at holes or openings with two coats of a Styrene acrylic sealer. Stack panels flat and remove fasteners to prevent damage and warping. Store panels in a protected area and avoid direct sunlight
- Surface Repairs:** Remove form release agent, concrete & loose wood/overlay debris. Sand the damaged surface with coarse (80 grit) disc or paper. For architectural concrete, use fine (120 grit) for the damaged perimeter area. Clean all sanding debris from the repair area. Apply: W.R. Meadows - Rezi-Weld Gel Paste State, Euclid - Euco #620 Gel Epoxy System, or Sika - Sikadur AnchorFix. Use the Rezi-Weld Gel Paste State when the air temp is above 60° F, or the Euco #620 Gel or Sikadur AnchorFix-4 when the air temp is above 33° F. Scrape off the excess repair material using a putty knife. Allow repair material to cure for 24 hours (48 hours in cold weather) before sanding, then, feather sand the area.

Environmental Impact

Olympic Panel produces overlaid plywood from veneer processed at the Olympic plant and manufactured to the following principles:

- Logs and veneer originate in sustainable, secondary growth forests, which are managed to Federal and Washington State regulations.
- Regular HDO form can be certified to FSC guidelines, SW-CoC-003397.
- Regular HDO form is LEED compliant and may contribute points for EQ Credit 4.4 for Low-Emitting Materials: Composite Wood.
- Olympic Panel uses energy efficient, environmental control technology to reduce emissions to levels below federal and state guidelines.
- Olympic Panel uses process by-products to produce energy.
- Olympics products are renewable, biodegradable and recyclable.



SW-COC-003397

The FSC trademark identifies products from well-managed forests © 1996 Forest Stewardship Council A.C.

Warnings

This product contains 0.03 parts/million of residual formaldehyde from manufacturing. This product will generate wood dust from sawing, sanding, or shaping. Material Safety Data Sheets are available on Olympic's Web site at www.olypanel.com and upon request. Structural panels (PS-1) are exempt from California Air Resources Board regulations, however, this product is below CARB limits for all applications.

Olympic Panel's Concrete Form Product Family

- Premium Concrete Form:**
 - Barrier Film™** - inert to alkalinity for harsh concrete mixes
 - MultiPour®** - Architectural finish & high re-use
 - Classic® HDO** - Alkalinity resistance exceeds Doug fir HDO
 - Super-Matte™ MDO** - Matte finish, slight grain/patch transfer
- Industry Standard Concrete Form**
 - Basic™ HDO** - Economical Doug fir HDO 100/30
 - Hi-Flow™ MDO** - Matte finish, high reuse
 - B-Matte® MDO** - Matte finish, high re-use

Olympic Panel Technical/Sales Information

204 East Railroad Avenue; Shelton, WA 98584

Sales phone: 800-445-2442 Sales Fax: 360-432-5081

www.olypanel.com

